

Novacolor
is a brand of
San Marco Group Spa


info@novacolor.it
+39 0543 401840
www.novacolor.it

SAN MARCO GROUP
Via Alta 10/A - 30020
Marcon (Venezia), Italia

info@sanmarcogroup.com
+39 041 4569322
www.sanmarcogroup.com

Celestia_Wall Painting

Decorative wall coating for interiors with a "Soft Touch" effect

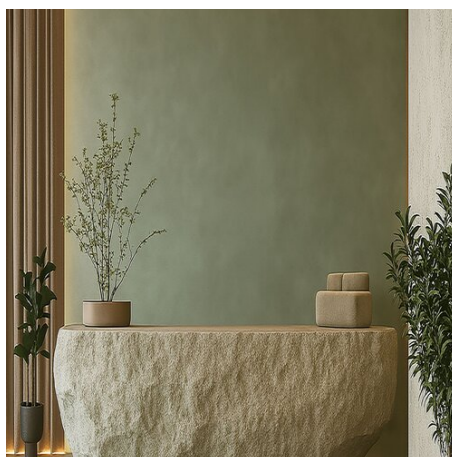

N371000

CELESTIA_WALL PAINTING - V.2026-01-30

PRODUCT DESCRIPTION

Celestia_Wall Painting is a decorative wall coating made of special elastic charges and resins which permits to achieve a visual and tactile leather-look with amazing shades and colours.

The surfaces with **Celestia_Wall Painting** on top ensure deep and emotional effects, perfectly aligned with the most modern and cutting edge trends for interiors in architectural fields.

IDENTIFICATION FEATURES

Binder nature: polyurethane and acrylic polymer in aqueous emulsion
Density: 1,08 ± 0,05 g/ml

PERFORMANCES

The application of **Celestia_Wall Painting** is simple, versatile, and practical, allowing both professional decorators and private individuals to create highly refined effects.

DILUTION

With 20% of water maximum.

WARNINGS

Mix the material thoroughly before tinting and before application.
Do not apply on fresh substrates; wait **Novalux E** to be completely dry.
Application on concrete surfaces has a decorative function.
Do not apply in the presence of rising damp.

APPLICATION

(Environnemental conditions T=25° C, UR=60%)

The substrate must be perfectly smooth, dry, dust-free, with no humidity and salt stains.

On substrate prepared with two coats of **Novalux E** tinted, apply two layers of **Celestia_Wall Painting** with "spalter" brush or stainless steel trowel, in crossed movements.

For information on the application techniques of the various effects, please refer to the dedicated page on the website.

RECOMMENDATION

When applying, the material must be protected from the cold and from big heat changes during the entire application process.

Do not apply at air, background and product temperatures below +5°C or above +35 °C.

Ambient humidity must be <75%; background humidity must be <10%.

In order not to compromise the optimal appearance and performance of the product, we recommend applying it in the above-mentioned ambient conditions.

It is advisable to complete each work with materials from the same batch of production. When using multiple batches, it is recommended to remix the various products together to avoid slight differences in shading.

For the correct use of the above materials, and for dilution and laying, please carefully read the technical data sheet.

The correct use of equipment and personal protective equipment (PPE) is recommended during all phases of background and product preparation, and of application).

CLEANING OF TOOLS

With water, immediately after use.

YIELD

6-8 m²/l, in two coats, depending on the kind of substrate and its absorption rate. It is recommended to carry out a preliminary test on the specific substrate to determine consumption.

COLORS

Celestia_Wall Painting color card.

PACKAGING

1 L ; 2,5 L packaging

STORAGE LIFE CONDITIONS

The product should preferably be used within 2 years if stored in its original, unopened containers and under suitable temperature conditions.

Storage temperature: from +5 °C to 30 °C.

SECURITY PROCEDURES

EU limit value (Dir. 2004/42/EC)

Cat. A₁/I: decorative effect coatings (water-base): 200 g/l (2010)

The product contains max: 200 g/l VOC

Use the product according to current health and safety regulations; after use, do not discard the containers in the environment; allow the residue to dry thoroughly, then treat as special waste. Do not dispose of residues in the sewers, waterways or ground. For more information consult the safety data sheet.